

## 1. Before Installing

Ensure that you have:

- ✓ AudioCodes Fax ATA, model MP-202B HTTPSFA~~X~~
- ✓ Included 12V power adapter (use only the one supplied for your country)
- ✓ Local network (LAN) with DHCP and Internet connection
- ✓ Fax Machine or fax-capable MFP



### YOUR FAX SOLUTION

The Fax ATA can be connected to either online service providers or to premise-based fax servers. You may have received additional steps or separate instructions with your Fax ATA so please check with your specific provider or fax server manager before proceeding.

### CREATE YOUR ACCOUNT

Depending on what fax provider or fax solution to which you are connecting your Fax Machine, you may have to first create your account. Refer to your provider supplied instructions that came with the Fax ATA or their web site for additional steps or details.



If you are connecting your Fax Machine through FaxCONNECTit to your own fax service provider account, make sure you sign up and create your account before continuing at: [www.faxconnectit.com](http://www.faxconnectit.com).




### CHECK FAX MACHINE SETTINGS

Turn off your Fax Machine's success notifications. Your fax provider or premise-based fax server will automatically send delivery notifications to your Fax Machine or directly to you via email.

If you are going to be receiving faxes at your Fax Machine, set your fax machine to auto-answer by default. Some Fax Machines do not retain this setting after being turned on or restarted.

## 2. Connecting

1. Connect the Ethernet Connector labeled "**WAN**" to your network.

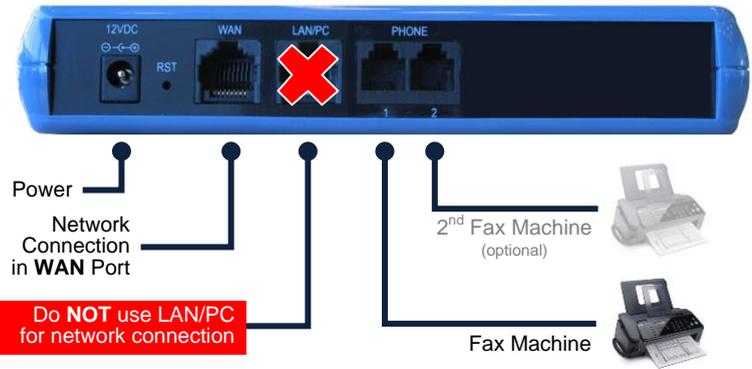


2. Connect the Telephone Port labeled **PHONE 1** to the Fax Machine. Check with your provider whether the second PHONE 2 port is enabled for use.
3. Connect the Power. There is no ON/OFF (I/O) switch so the Fax ATA turns on as soon as you connect the power. The **POWER** LED is lit (green) and when initialization completes (~1 minute), the **STATUS** LED changes from red to green.

**Getting Help:** Go to [www.faxata.com](http://www.faxata.com) for additional help and documentation.



### INITIALIZATION

Wait for all 3 status lights to go green. Usually within a minute, however could be more than 5 minutes if an automatic upgrade is needed and can also vary depending on your Internet speed.

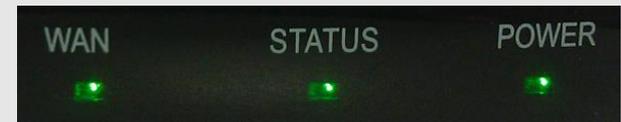

### 3. Activating



Before you can send faxes, you will need to activate your Fax ATA. Refer to specific instructions supplied by your provider or fax server manager. **Note:** Connections to some service provider connections and premise-based fax servers may not require activation.

To activate your Fax ATA, follow the steps below.

1. Make sure you have your **PIN** for activation. This is supplied by your provider or fax server administrator.
2. You activate the Fax ATA from your Fax Machine or MFP.
3. Go off-hook and dial the following:  
**\*1\**<PIN>*#** (for example, dial **\*1\*1234#**)
4. Press SEND or START if your Fax Machine requires this step to start dialing.
5. You will hear an audio confirmation once the activation is complete.

### 4. Send a Fax

You can now send a fax from your Fax Machine.

**Getting Help:** Go to [www.faxata.com](http://www.faxata.com) for additional help and documentation.

#### Notice

This guide describes the installation of AudioCodes' **MP-202B HTTPS FAX Fax ATA** device. For other additional information on the MP-20x Telephone Adapter series, including models MP-201B/1FXS, MP-202B/2FXS and MP-204B/4FXS which do not support HTTPS FAX connections, refer to the downloads site listed below. Information contained in this document is believed to be accurate and reliable at the time of printing. However, due to ongoing product improvements and revisions, AudioCodes cannot guarantee accuracy of printed material after the date published nor can it accept responsibility for errors or omissions. Updates to this document can be viewed by registered customers at: [www.faxata.com](http://www.faxata.com).

© Copyright 2012 AudioCodes Ltd. All rights reserved.

This document is subject to change without notice. Refer to the current Release Notes that may be included with your documentation or hardware delivery.

Date Published: February 27-2012



[www.audiocodes.com](http://www.audiocodes.com)

AudioCodes CPE & Access Gateway Products

MP-20x series

MediaPack™ Series Telephone Adapters  
with Integrated Router

## Fax ATA MP-202B HTTPS Fax Adapter

### Quick Installation Guide

LTRT-041-HTTPS FAX



HTTPS FAX

